
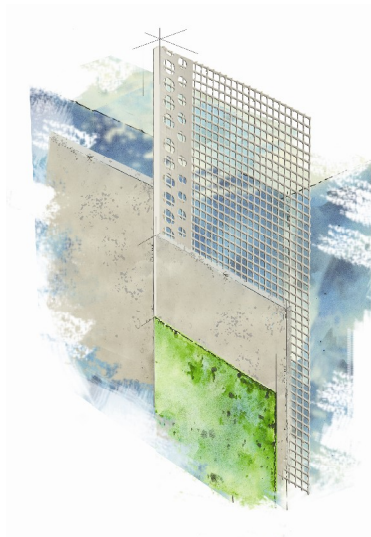


TECHNICAL DATA SHEET

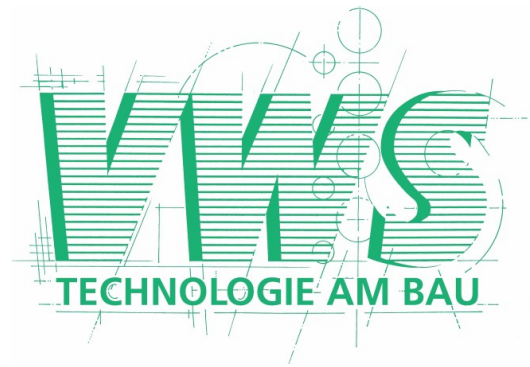

Render stop bead PVC with mesh
Article no. 6410-6417

Specifications:

Basic shape	angle bead							
	Article no.	6410	6411	6412	6413	6414	6415	6416
Plaster thickness	5 mm	10 mm	14 mm	20 mm	3 mm	8 mm	12 mm	6 mm
Lengths of profiles	2.5 m	2.5 m	2.5 m	2.5 m	2.5 m	2.5 m	2.5 m	2.5 m
Packing unit	25 pcs.	25 pcs.	25 pcs.	25 pcs.	25 pcs.	25 pcs.	25 pcs.	25 pcs.
Packing content	62.5 m	62.5 m	62.5 m	62.5 m	62.5 m	62.5 m	62.5 m	62.5 m

Application: thermal insulation systems / EIFS

Render stop beads permit an exact partition of wall coatings in the interior and exterior. With this profile you are able to separate miscellaneous plaster structures or colours properly.

Equipment of the product:

PVC profile out of impact resistant and UV- and weather-proof PVC
The fibre glass reinforcement is alkali-proof and dislocation resistant.

Important details:

Cool and dry storage!
Horizontal transporting and stocking!

All details comply with the up-to-date our knowledge and experience. Our information characterise simply the character our products and don't account for contractual legal relationship. They don't absolve the customer from verifying our products to their applicability for the contemplated usage on their own. We reserve the right for changing due to technical or planning laws. Product-drawings on this sheet aren't true to scale. With publishing this technical data sheet are all back issues invalid. As of 01.2009 Rev. d (22.01.2010)