


# TECHNICAL DATA SHEET

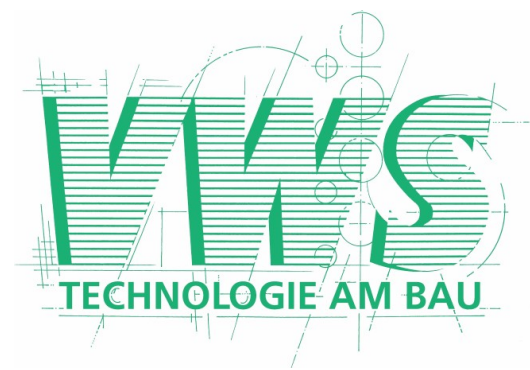

## Dripnose bead Exklusiv PVC with mesh Article no. 6485

### Specifications:

Basic shape	mesh corner bead
Lengths of profiles	2.5 m
Thickness of plaster	6 mm
Width of mesh	10 cm x 10 cm
Packing unit	10 pieces in a box
Packing content	25 m

### Application: thermal insulation systems / EIFS

The dripnose bead acts for an exact and robust termination of render with a dripnose at roller shutter casings, underside of balconies, windows lintels, plinth weatherings without profiles etc. Due to its punched and chequered construction and its two-sided mesh stripes it achieves a very good connection with the plaster and a crack formation in this area will be minimized as far as possible!

### Equipment of the product:

The dripnose bead is produced out of impact resistant and UV- and weather-proof PVC. The mesh of the dripnose bead is alkali-proof and dislocation resistant a fibre glass reinforcement.

### Important details:

Cool and dry storage!  
Horizontal transporting and stocking!

All details complies the up-to date our knowledge and experience. Our information characterise simply the character our products and don't account for contractual legal relationship. They don't absolve the customer from verifying our products to their applicability for the contemplated usage on their own. We reserve the right for changing due to technical or planning laws. Product-drawings on this sheet aren't true to scale. With publishing this technical data sheet are all back issues invalid. As of 12.2006 Rev. e (05.2011)